

2/11

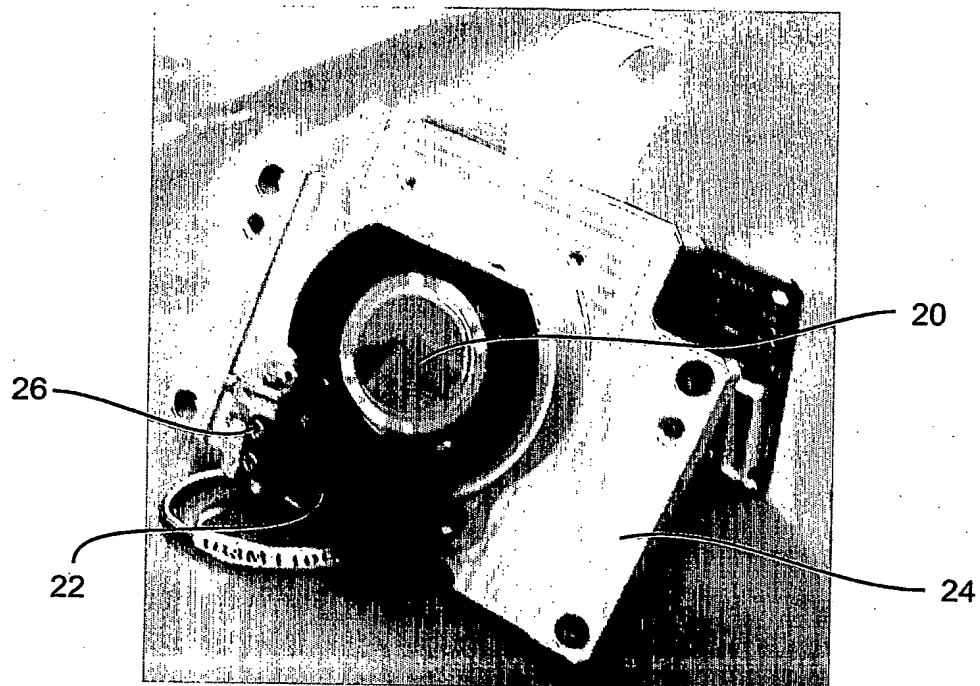


Fig. 3

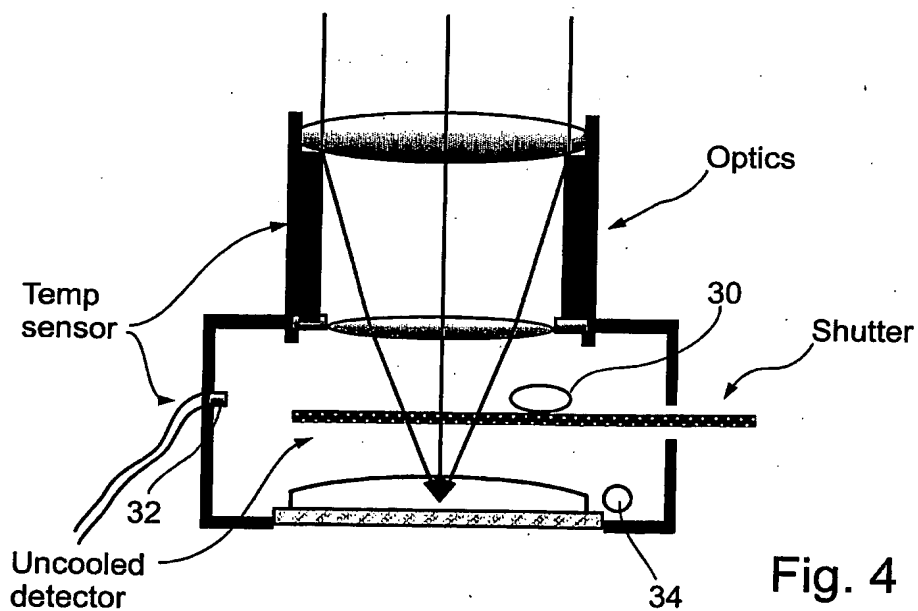


Fig. 4


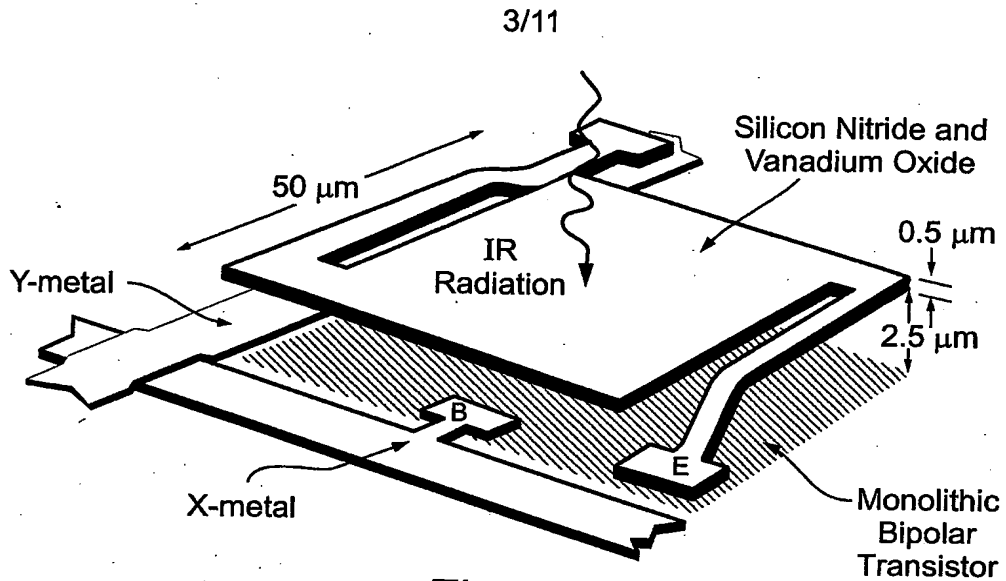


Fig. 5

Frequency response

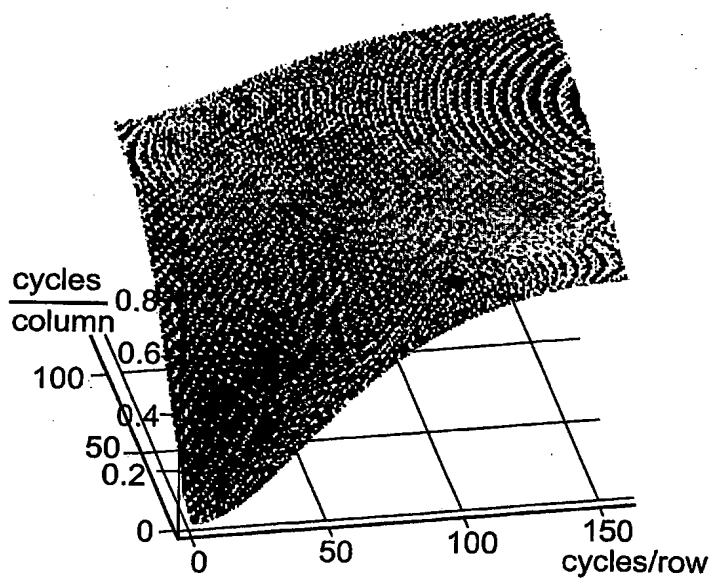

High pass filter frequency response. Time filter is the MTF inverse approximation for a detector that contains 320 by 240 elements

Fig. 6

4/11

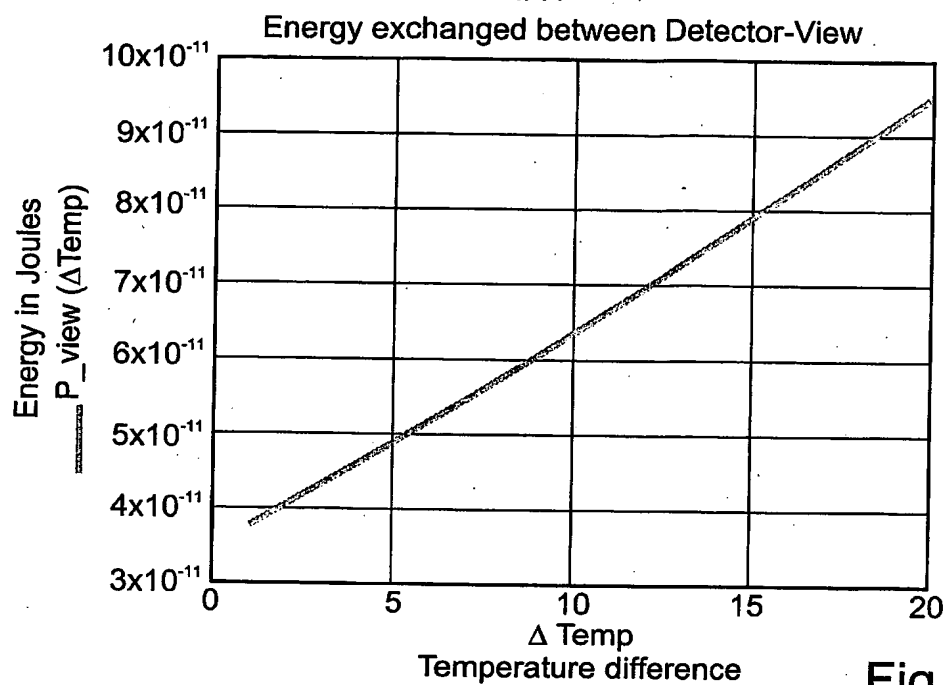


Fig. 7

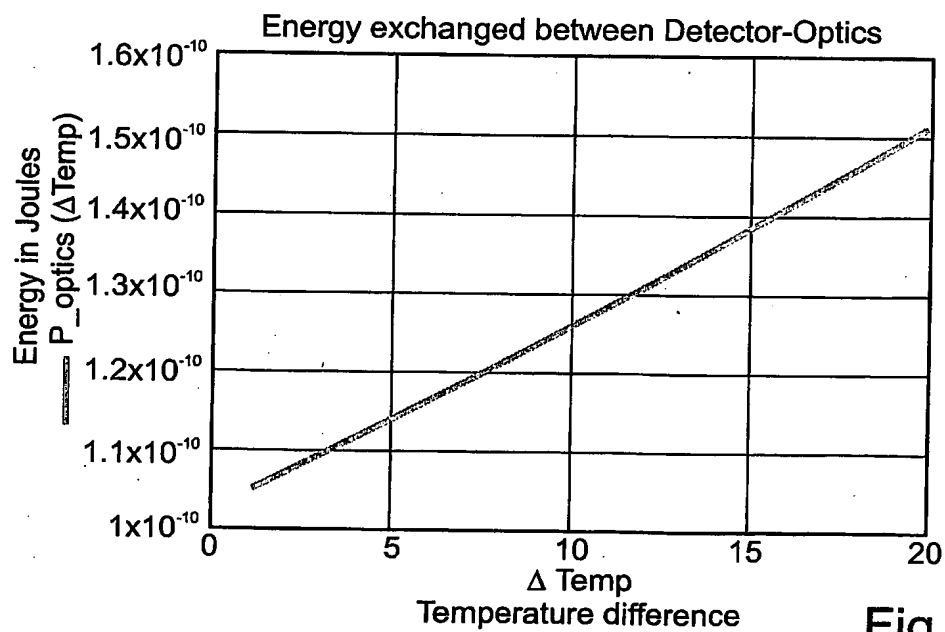


Fig. 8

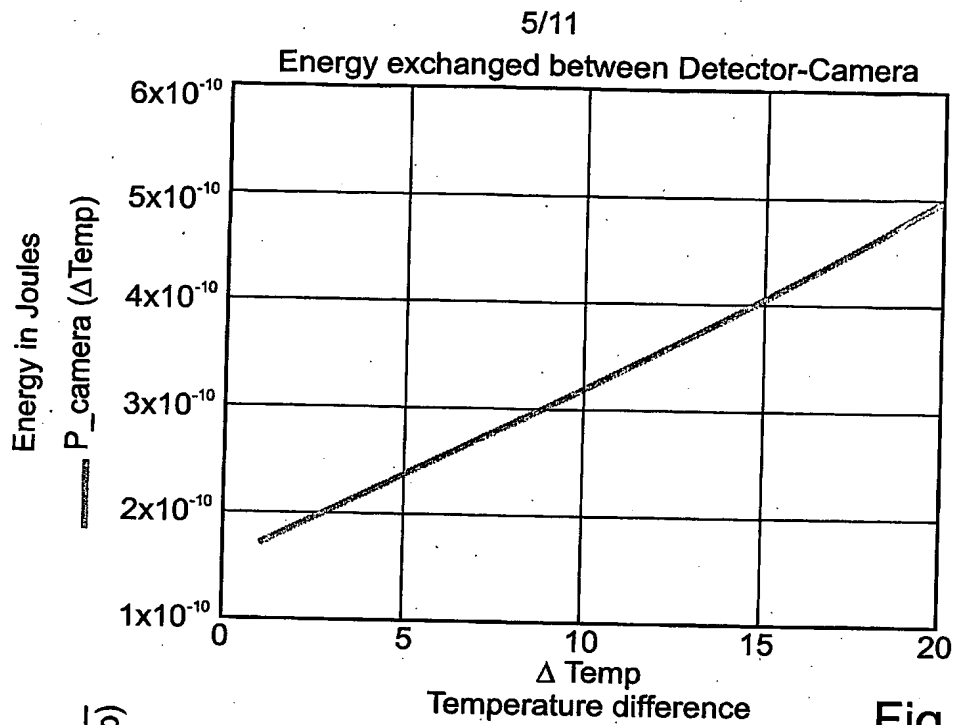


Fig. 9

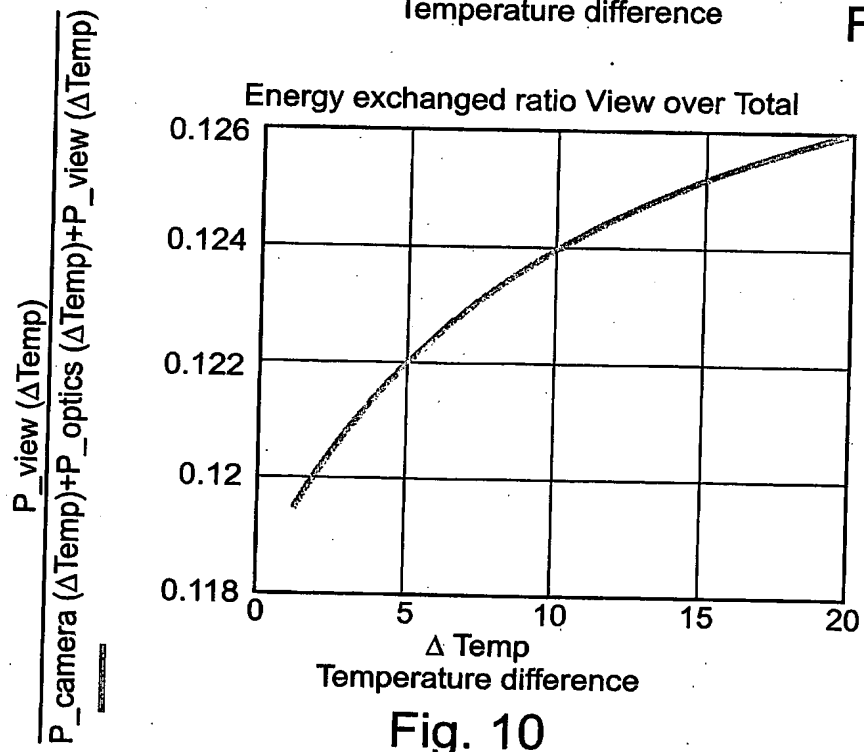


Fig. 10

6/11

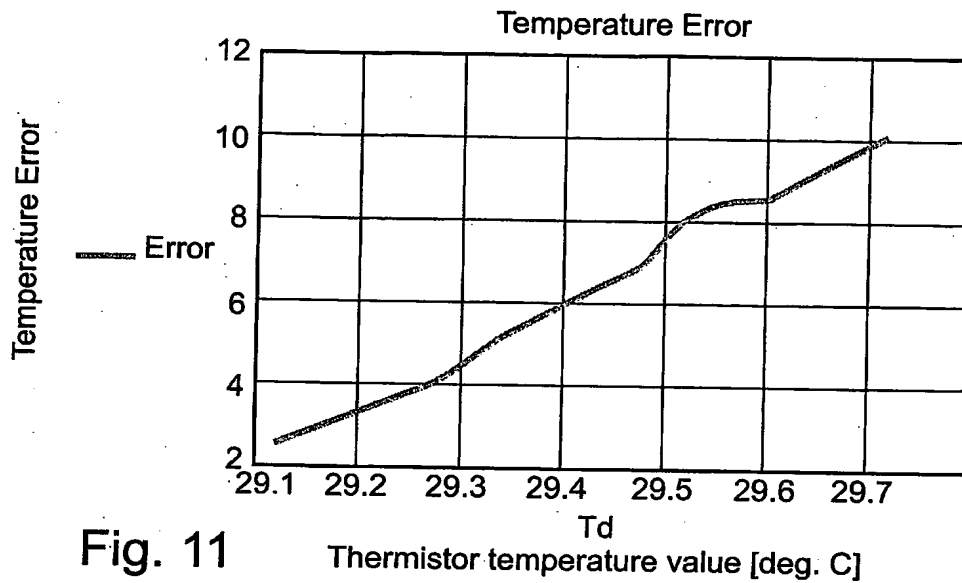


Fig. 11

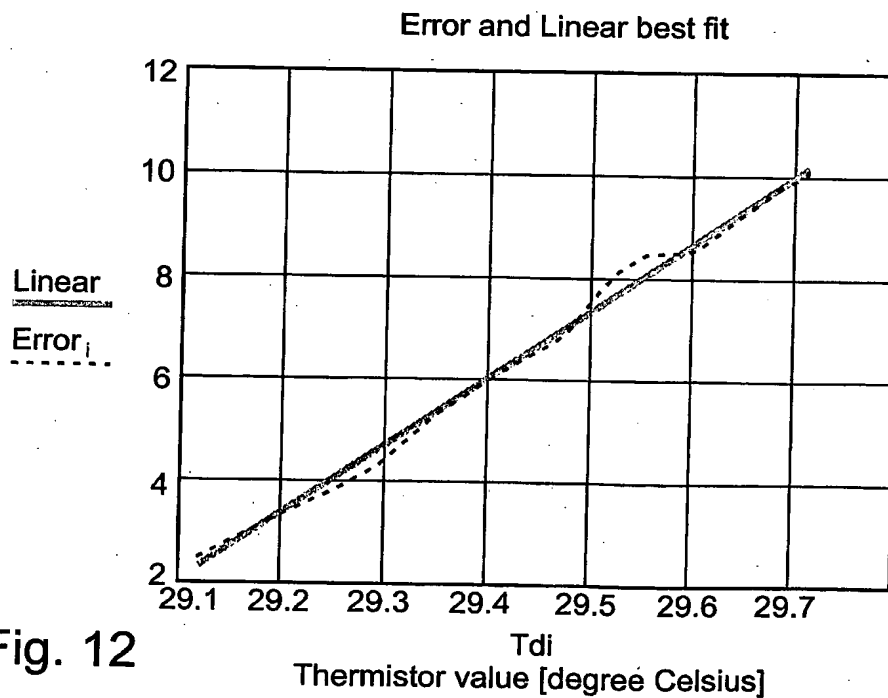


Fig. 12

7/11

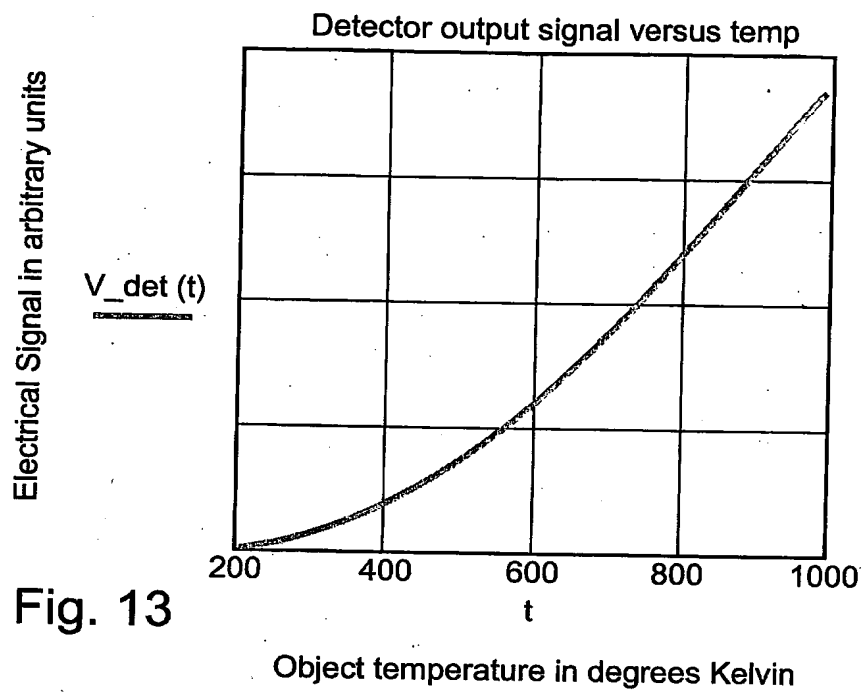


Fig. 13

8/11

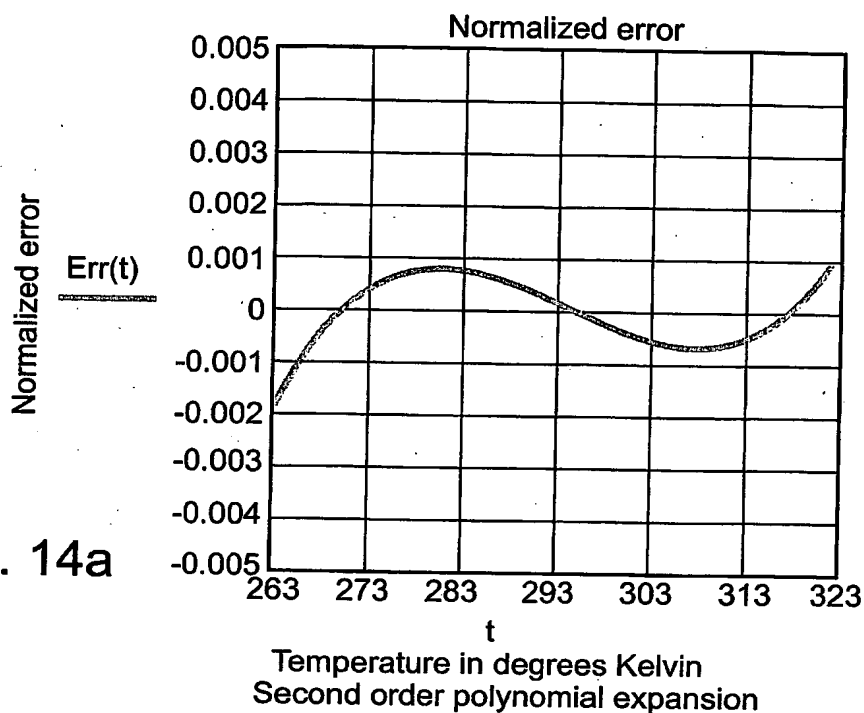


Fig. 14a

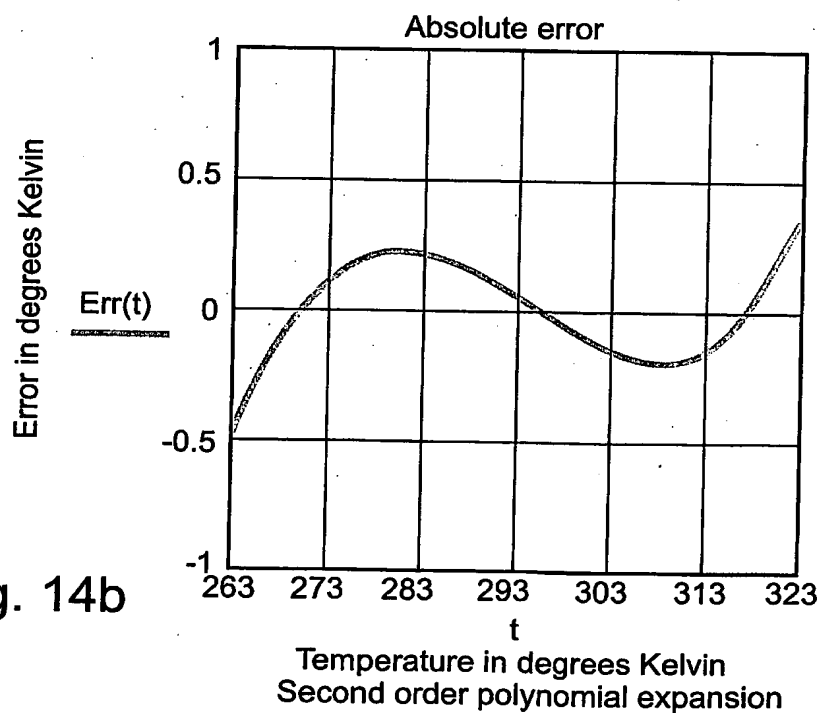


Fig. 14b



9/11

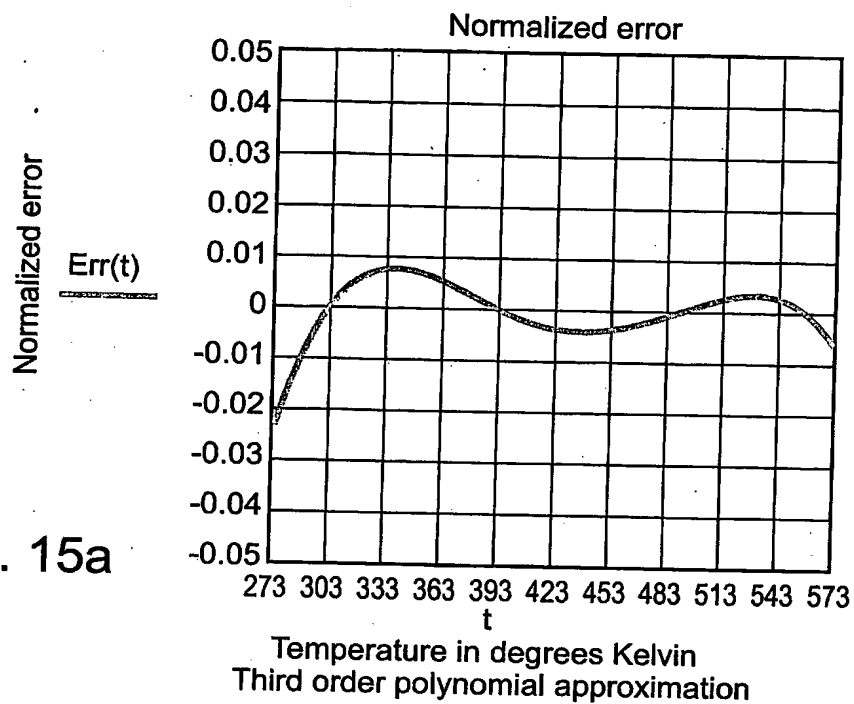


Fig. 15a

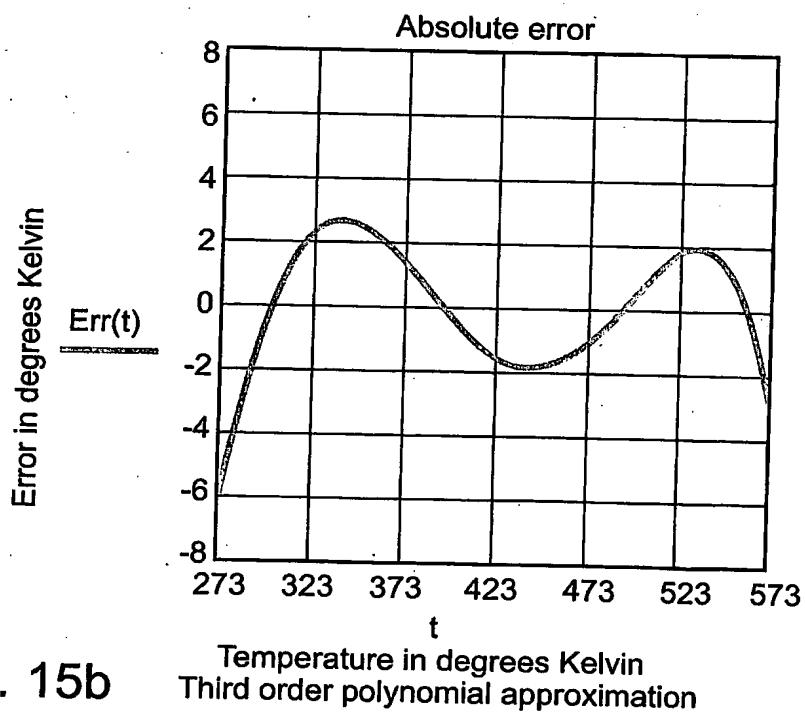


Fig. 15b

10/11

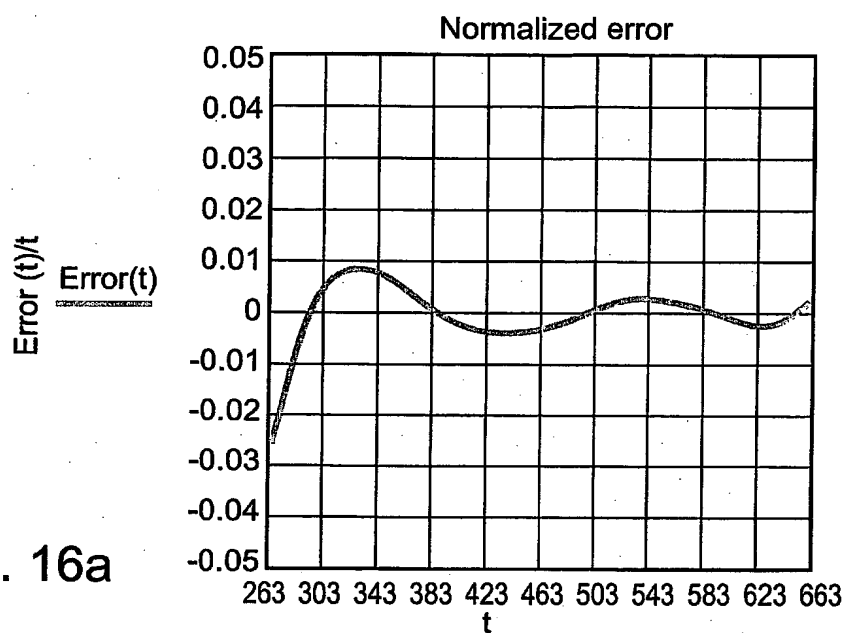


Fig. 16a

Temperature in degrees Kelvin  
Fourth order polynomial expansion approximation


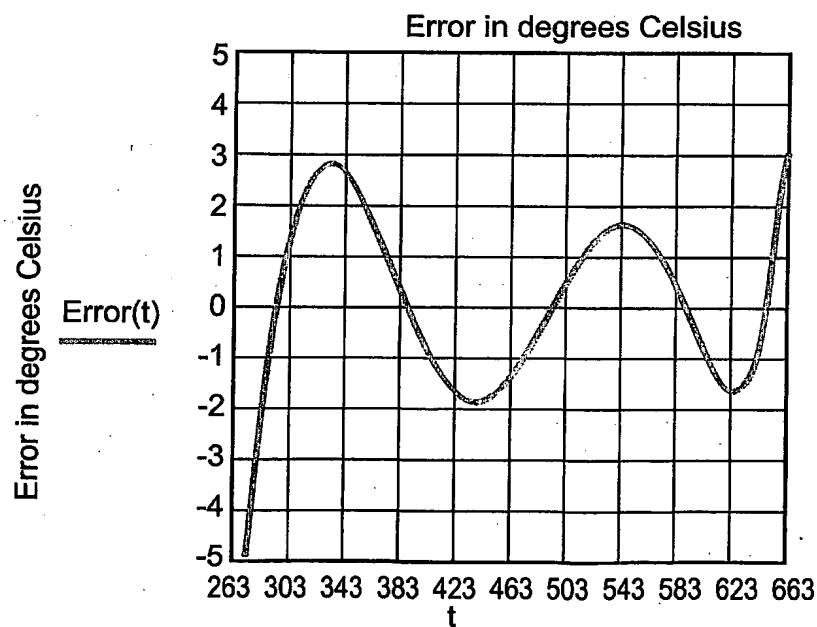


Fig. 16b

Temperature in degrees Kelvin  
Fourth order polynomial expansion approximation

11/11

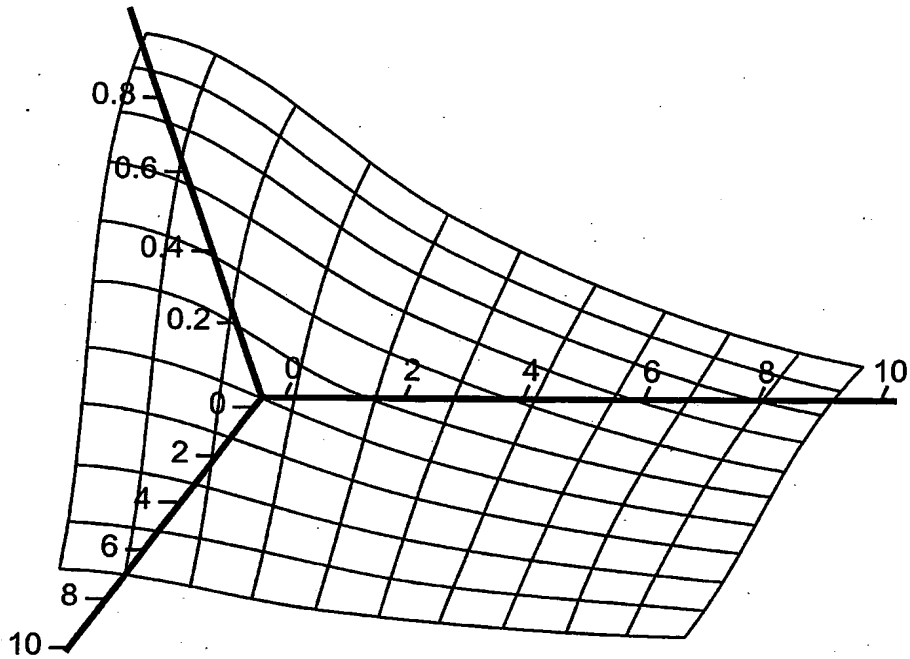

Fourier transform of camera impulse response

Fig. 17